




504-362-0781 or 800-889-0781  
2236 Manhattan Blvd. Harvey, LA 70058 Fax: 504-367-4216

---

## Grade 80 Clevis Sling Hook

Forged alloy steel, heat treated. Painted. According to ASTM A952.

Sizes 9/32" through 3/4" also available in DOMESTIC.

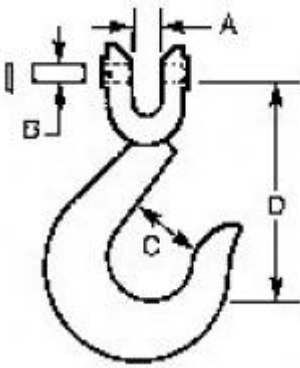

To assemble:

1. Fully insert clevis pin.
2. Secure clevis pin by driving locking pin into place until flush with body of hook.

Size	Working Load Limit in lbs.	Approx. Wt. ea. in lbs.	A	B	C	D
Size	Working Load Limit in lbs.	Approx. Wt. ea. in lbs.	A	B	C	D
9/32"	3,500	1.19	.34	.35	1.00	3.40
3/8"	7,100	2.2	.48	.51	1.20	4.13
1/2"	12,000	4.07	.60	.63	1.61	5.06
5/8"	18,100	6.83	.75	.83	1.97	6.11
3/4"	28,300	12.12	.83	1.02	2.36	7.24

---