



504-362-0781 or 800-889-0781  
2236 Manhattan Blvd. Harvey, LA 70058 Fax: 504-367-4216

---

## **ATB-LS Marine Lubricant**



# Marine Lubricant

**An Environmentally Friendly  
Lubricant Designed Specifically  
for the Articulated Tug and  
Barge Industry.**

**For General or Severe Weather Conditions.**

**This White, Non-Toxic, Food Grade, Lubricant Provides  
Clean, Safe, Efficient Lubrication While Safeguarding  
Our Environment. Passes U.S. EPA LC50 and  
U.S. Fish and Wildlife Service Requirements.**

**For Use On...**

- Coupler Systems
- Bow Ram Assemblies
- Side Pads
- And Other Applications

**ATB-LS Marine Lubricant Specifications:**


Typical Tests	Results
U.S. EPA LC50 Aquatic Life Non-Toxicity Test	Passes
U.S. EPA Static Sheen Test	Passes
Lubricant Type / Soap Base	Aluminum Complex
Penetration (Worked) (ASTM D-217) 80 Strokes	290
10,000 Strokes	320
Typical Worked Penetration (60)	303
NLGI Grade	1 1/2
Dropping Point	446°F / 230°C
Copper Corrosion	1b
Base Oil Viscosity - cSt@40°C / SUS@100°F	600 / 3170
Rust Prevention Procedure (B) (ASTM D-1743)	Pass
Oxidation Stability (ASTM D-942) 100 Hours	2.0 psi
Four Ball Wear, (ASTM D-2266) 1 Hr., 40 kg., 75°C, 1200 rpm	0.55 mm
Water Washout (ASTM D-1264)	0.24%
Lincoln Ventmeter Tests	
Temperature 72°F	225 psig
Temperature 30°F	375 psig
Temperature 0°F	850 psig

\*Manufactured with non-toxic, USP white mineral oil and other ingredients that comply with FDA regulation 21 CFR 178.3570 for H-1 Class, Food Grade Lubricants.



Distributed by: GATOR SUPPLY COMPANY • HARVEY, LA 70058  
Phone: 504-362-0781 • Toll Free 800-889-0781  
E-mail: [info@GATORSUPPLY.com](mailto:info@GATORSUPPLY.com) • website: [www.GATORSUPPLY.com](http://www.GATORSUPPLY.com)

Sold In 120 lb Lined Drums

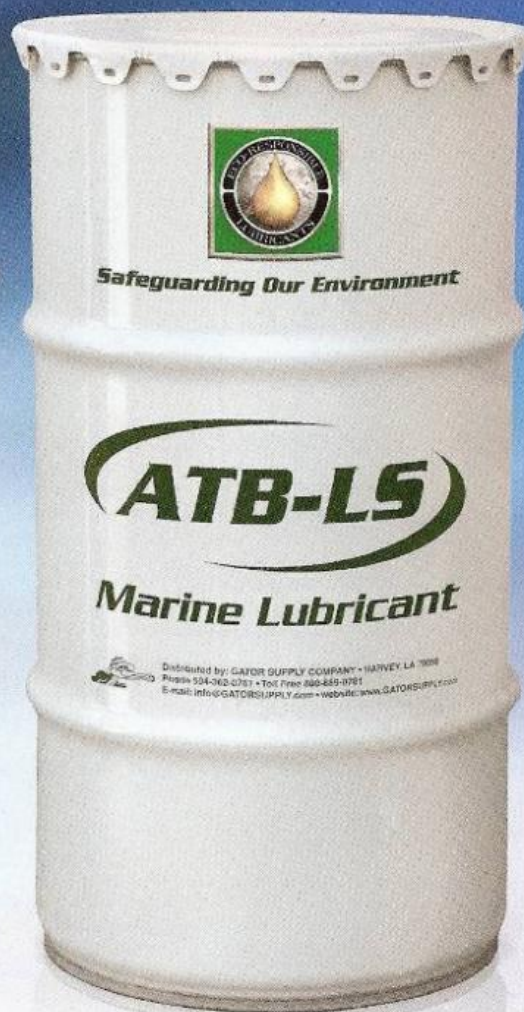

Large Inventory / Immediate Shipments  
Stocking Locations / Newark, NJ / New Orleans, LA  
Private Labeling Available / Minimum Quantity Required



## **ATB-LS Marine Lubricant Features / Benefits**

<b>FEATURE</b>	<b>BENEFIT</b>
<b>Aluminum-Complex Thickener</b>	<b>Shear Stable Grease Does Not Soften</b>
<b>Heavy Base Fluid Tacky Consistency</b>	<b>Outstanding Adherence To Metal</b>
<b>USP Type Base Fluid</b>	<b>Purest Available / Non-Toxic</b>
<b>Minimal .24% ASTM Water Washout Test</b>	<b>Outstanding "Stay-Put" Ability Salt Water Resistant</b>
<b>Passes US EPA Acute Toxicity Test</b>	<b>Does Not Harm Marine Wildlife Environmentally Responsible</b>
<b>Passes US EPA Static Sheen Test</b>	<b>Does Not Form Water Surface Sheen</b>