




504-362-0781 or 800-889-0781  
 2236 Manhattan Blvd. Harvey, LA 70058 Fax: 504-367-4216

## Bright Wire Rope - 6x37 Class

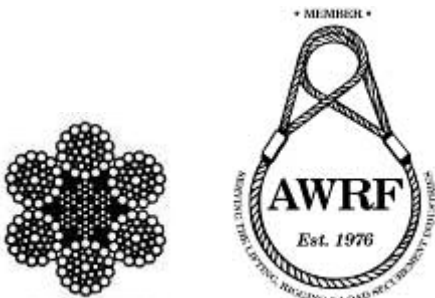

6 x 36 Warrington Seale with IWRC

### Also available -Filler Wire with Fiber Core

According to Federal Specification RR-W-410D. Meets the performance requirements of API-9A, and proposed A.S.T.M. National Standard on Wire Rope for General Purposes, as applicable. Preformed, right regular lay.

**Diameter in Inches IWRC (EIPS) - Approx. Weight per foot in Pounds IWRC (EIPS) - Breaking Strength in Tons\***

Diameter in Inches	IWRC (EIPS) - Approx. Weight per foot in Pounds	IWRC (EIPS) - Breaking Strength in Tons*
1/4	.116	3.4
5/16	.18	5.27
3/8	.26	7.55
7/16	.35	10.2
1/2	.46	13.3
9/16	.59	16.8
5/8	.72	20.6
3/4	1.04	29.4
7/8	1.42	39.8
1	1.85	51.7
1.1/8	2.34	65.0
1.1/4	2.89	79.9
1.3/8	3.50	96.0
1.1/2	4.16	114.0
1.5/8	4.88	132.0
1.3/4	5.67	153.0
2	7.39	198.0
2.1/4	9.36	247.0
2.1/2	11.6	302.0
2.3/4	14.0	361.0
3	16.6	425.0