




504-362-0781 or 800-889-0781
 2236 Manhattan Blvd. Harvey, LA 70058 Fax: 504-367-4216

Galvanized Wire Rope - 6x37 Class

According to Federal Specification RR-W-410D. Meets the performance requirements of API-9A, and proposed A.S.T.M. National Standard on Wire Rope for General Purposes, as applicable. Preformed, right regular lay.

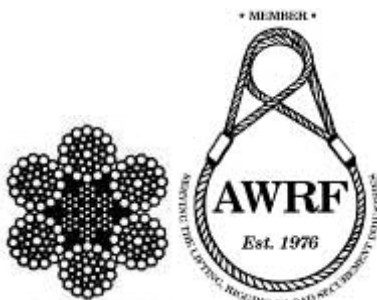

6 x 36 Warrington Seale with IWRC

Also available in Filler Wire with Fiber Core

| Diameter in Inches | Drawn Galvanized IWRC(EIPS)**/** - Approx. Weight per foot in Pounds | Drawn Galvanized IWRC(EIPS)**/** - Breaking Strength in Tons* |
|--------------------|--|---|
| Diameter in Inches | Drawn Galvanized IWRC(EIPS)**/** - Approx. Weight per foot in Pounds | Drawn Galvanized IWRC(EIPS)**/** - Breaking Strength in Tons* |
| 1/4 | .116 | 3.4 |
| 5/16 | .18 | 5.27 |
| 3/8 | .26 | 7.55 |
| 7/16 | .35 | 10.2 |
| 1/2 | .46 | 13.3 |
| 9/16 | .59 | 16.8 |
| 5/8 | .72 | 20.6 |
| 3/4 | 1.04 | 29.4 |
| 7/8 | 1.42 | 39.8 |
| 1 | 1.85 | 51.7 |
| 1.1/8 | 2.34 | 65.0 |
| 1.1/4 | 2.89 | 79.9 |
| 1.3/8 | 3.50 | 96.0 |
| 1.1/2 | 4.16 | 114.0 |
| 1.5/8 | 4.88 | 132.0 |
| 1.3/4 | 5.67 | 153.0 |
| 2 | 7.39 | 198.0 |
| 2.1/4 | 9.36 | 247.0 |
| 2.1/2 | 11.6 | 302.0 |
| 2.3/4 | 14.0 | 361.0 |
| 3 | 16.6 | 425.0 |