




504-362-0781 or 800-889-0781

2236 Manhattan Blvd. Harvey, LA 70058 Fax: 504-367-4216

Van Beest (Green Pin) and Campbell Drop Forged Wire Rope Clips

European (The Netherlands) and USA - Both Companies of Equal Quality

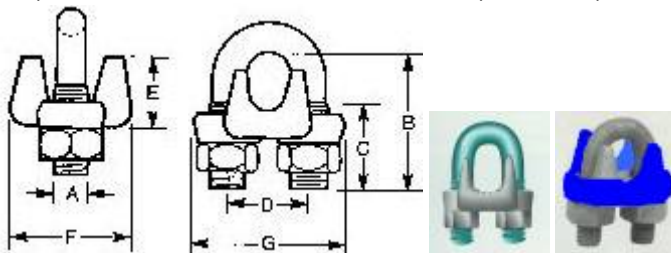

Read important warnings and information on the safety page concerning installing U-bolt wire rope clips. Failure to understand and follow the instructions outlined can result in serious injury or death.

** Based on clean, un-lubricated threads

Size	Min. Number of Clips Required	Torque in Feet lbs.*	Amount of Wire Rope to Turn Back	Approx. Weight each in Pounds	Dimensions in Inches - A	Dimensions in Inches - B	Dimensions in Inches - C	Dimensions in Inches - D	Dimensions in Inches - E	Dimensions in Inches - F	Dimensions in Inches - G
1/8"	2	4.5	3.1/4"	.05	.19	.75	.44	.44	.38	.81	.94
3/16"	2	7.5	3.3/4"	.10	.25	.94	.56	.56	.50	.94	1.19
1/4"	2	15	4.3/4"	.18	.31	1.06	.56	.75	.63	1.19	1.50
5/16"	2	30	5.1/4"	.31	.38	1.44	.75	.88	.75	1.31	1.69
3/8"	2	45	6.1/2"	.46	.44	1.50	.75	1.00	.88	1.56	1.94
7/16"	3	65	7"	.73	.50	1.88	1.00	1.19	1.00	1.81	2.31
1/2"	3	65	11.1/2"	.73	.50	1.88	1.00	1.19	1.06	1.81	2.31
9/16"	3	95	12"	.96	.56	2.38	1.25	1.31	1.13	2.06	2.50
5/8"	3	95	12"	1.00	.56	2.38	1.25	1.31	1.25	2.06	2.50
3/4"	4	130	18"	1.50	.63	2.75	1.38	1.50	1.38	2.31	2.75
7/8"	4	225	19"	2.44	.75	3.19	1.44	1.81	1.69	2.63	3.31
1"	5	225	26"	2.7	.75	3.63	1.75	1.88	1.75	2.63	3.47
1.1/8"	6	225	34"	3.1	.75	4.00	2.00	2.00	1.88	2.81	3.56
1.1/4"	7	360	44"	4.6	.88	4.38	2.25	2.31	2.06	3.25	4.06
1.3/8"	7	360	44"	5.2	.88	4.63	2.31	2.38	2.25	3.44	4.25
1.1/2"	8	360	54"	5.9	.88	4.94	2.38	2.63	2.25	3.44	4.25
1.3/4"	8	590	61"	9.8	1.13	5.88	2.75	3.06	2.88	3.75	5.25
2"	8	750	71"	13.75	1.25	6.50	3.00	3.31	3.38	4.44	5.81
2.1/4"	8	750	73"	15.7	1.25	7.13	3.31	3.88	3.81	4.50	6.31
2.1/2"	9	750	84"	17.9	1.25	7.75	3.38	4.13	4.25	4.50	6.44
2.3/4"	10	750	100"	22.0	1.25	8.31	3.50	4.38	5.00	5.00	6.75
3"	10	1,200	106"	32.0	1.50	9.19	3.88	4.75	5.25	5.31	7.56